

## Technical Service Bulletin

**SUBJECT:** Minimum allowable distance between chassis components and the retarder


**Products Affected:** All Focal models

**Effective Date:** 4dec01

Telma is committed to a philosophy of continuous improvement as a way of enhancing the end-user's experience with our product.

Components in the vicinity of the retarder should be no closer than specified below for typical retarder applications to prevent damage to heat sensitive components such as nylon air-lines, wiring, rubber, etc.

Heat shields or deflectors should be used to protect heat sensitive components from the Telma rotor exhaust. Refer to Telma service bulletin TIL05036 – Telma heat shield guidelines for more details.

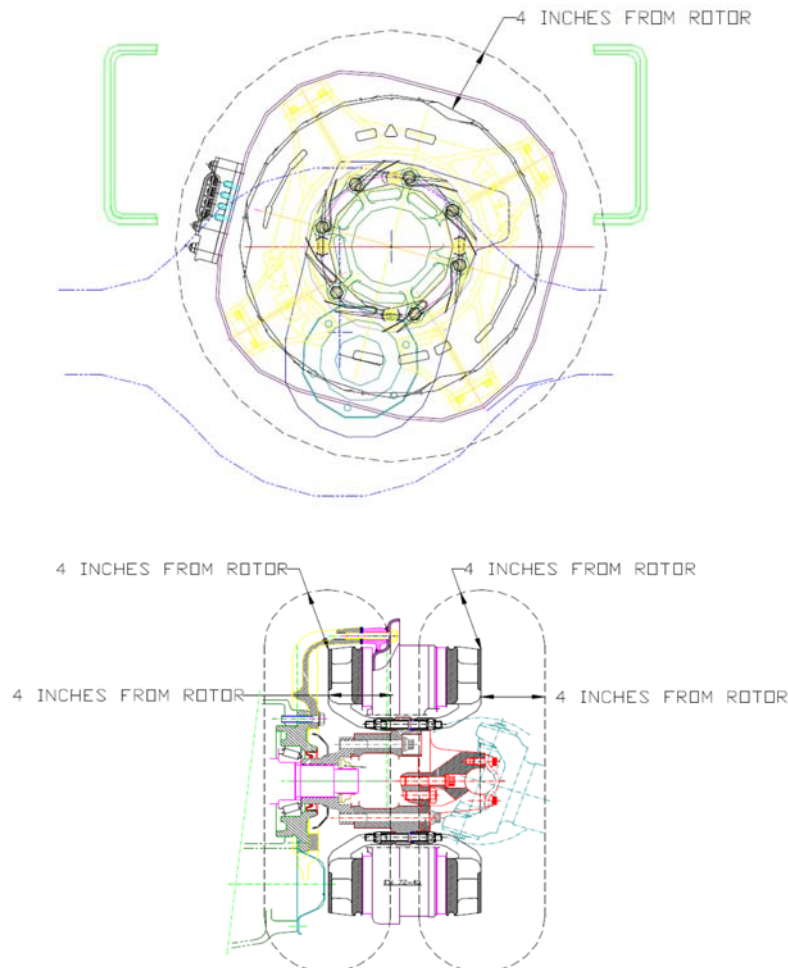

If you have any questions, contact Telma customer support at 800 797-7714, go to the Telma Web site at [www.telmausa.com](http://www.telmausa.com), or send an email to [engineering@telmacse.com](mailto:engineering@telmacse.com) with your questions 24 hours a day / 7 days a week.

This document is the exclusive property of TELMA RETARDER INC. It cannot be copied, modified, forwarded, or given to any third party without prior agreement from TELMA RETARDER INC. Any infringement will immediately involve legal action.