# TL114031 HYD BRAKE WIRING DIAGRAM WITH TRCM AND OBD2 14aug13jh

CAN control features:
TRCM active outputs turn off under the following conditions.
1) during ABS event (with progressive reactivation)
2) Speed below 1 mph
3) Throttle position greater than 1%
4) Cruise Control is engaged (except 2012 F550)

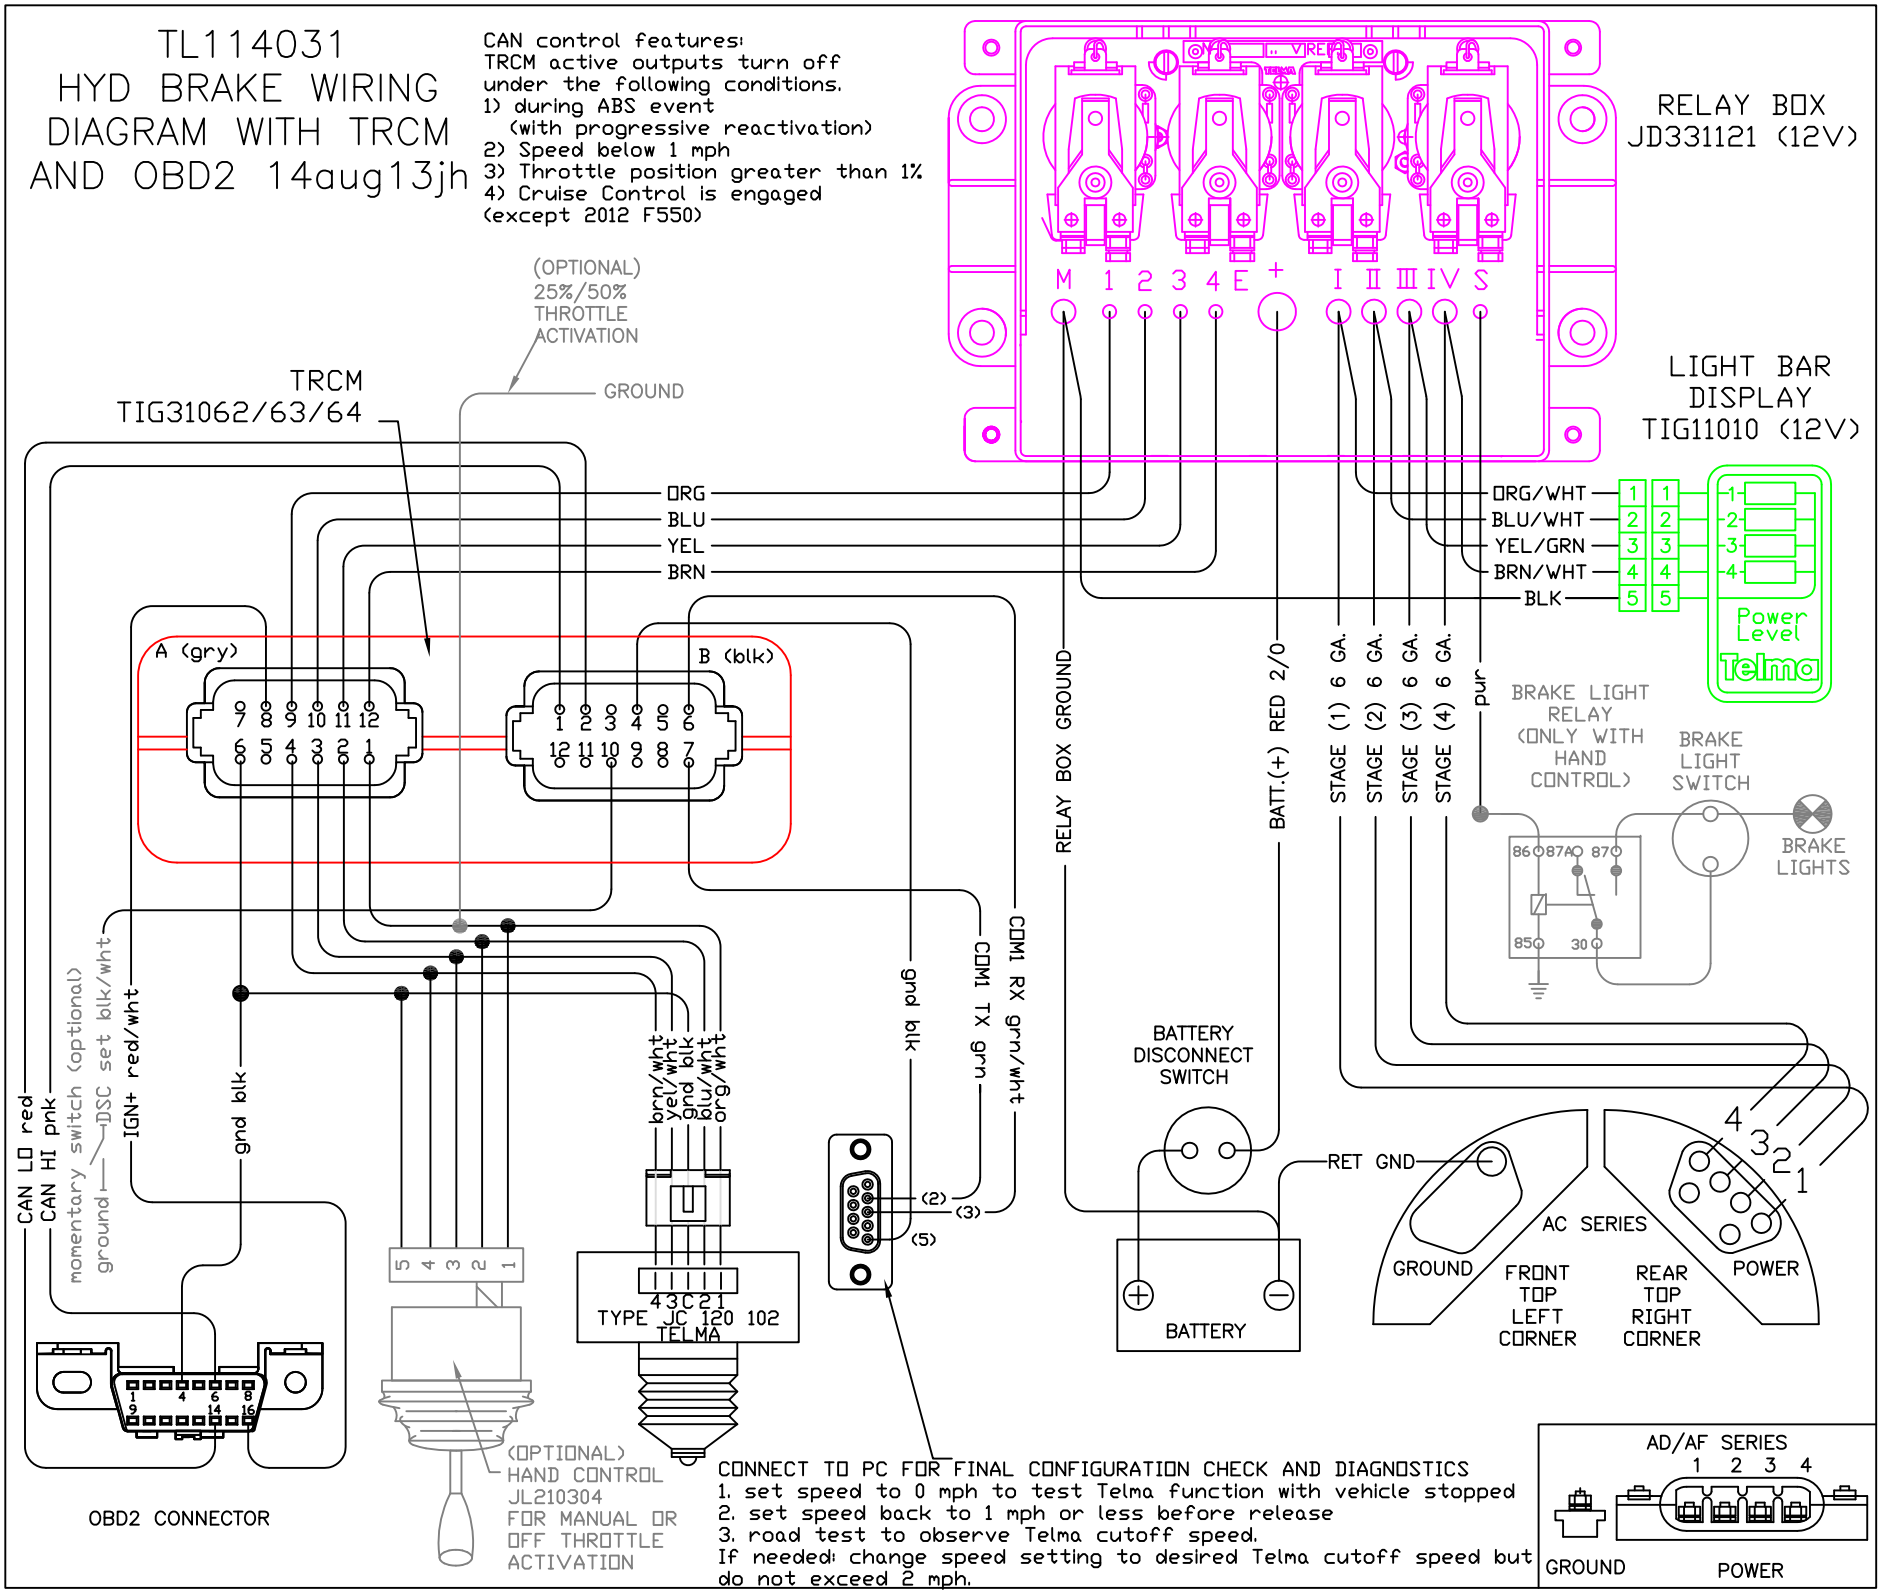


CONNECT TO PC FOR FINAL CONFIGURATION CHECK AND DIAGNOSTICS
1. set speed to 0 mph to test Telma function with vehicle stopped
2. set speed back to 1 mph or less before release
3. road test to observe Telma cutoff speed.
If needed: change speed setting to desired Telma cutoff speed but do not exceed 2 mph.