


# NAVISTAR 3200 CONTROL WIRING HYDRAULIC BRAKES

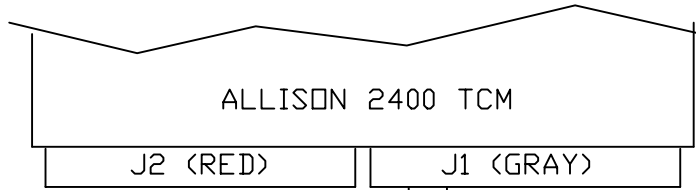

REPROGRAM ALLISON TCM PIN J1-22  
(OUTPUT SPEED INDICATOR) TO  
GROUND ON ABOVE 70 SHAFT RPM  
GROUND OFF BELOW 60 SHAFT RPM

ALLISON 1000/2000 TCM  
PIN J1-22 (OUT-) TML P/N  
INT # 3517243C1  
PACKARD # 12084912  
female 18G

+12V DURING  
WHEEL SLIP

WABCO HYDRAULIC  
D VERSION FRAME  
MOUNT ABS  
MODULE

WABCO BLACK  
CONNECTOR  
PIN 7  
IHC WIRE  
N94AD 18 GY

WABCO FRAME MOUNT ABS HARNESS CONNECTOR  
SOLID CRIMP TYPE SOCKET CONTACT TML  
DEUTSCH # 0462-209-16141 (14G-16G)  
NAVISTAR # 2034787C1 (14-16G)  
DEUTSCH # 0462-201-16141 (16G-18G)  
NAVISTAR # 1680205C1 (16-18G)  
HAND CRIMP TOOL FOR SOLID CONTACTS  
LADD # HDT-1561  
VENDOR: LADD INDUSTRIES 800 223-1236

25-MAY-05

← IGNITION +12V RED/WHT 18G

DO NOT  
CONNECT

10AMP  
FUSE

PNK 18G

