


TL114047 WIRING DIAGRAM WITH TRCM AND OBD2 without foot switch 1apr17jh

CAN control features:
TRCM active outputs turn off under the following conditions.
1) during ABS event
(with progressive reactivation)
2) Speed below 1 mph
3) Throttle position greater than 1%
4) Cruise Control is engaged
(except 2012 F550 and G4500 gasoline)

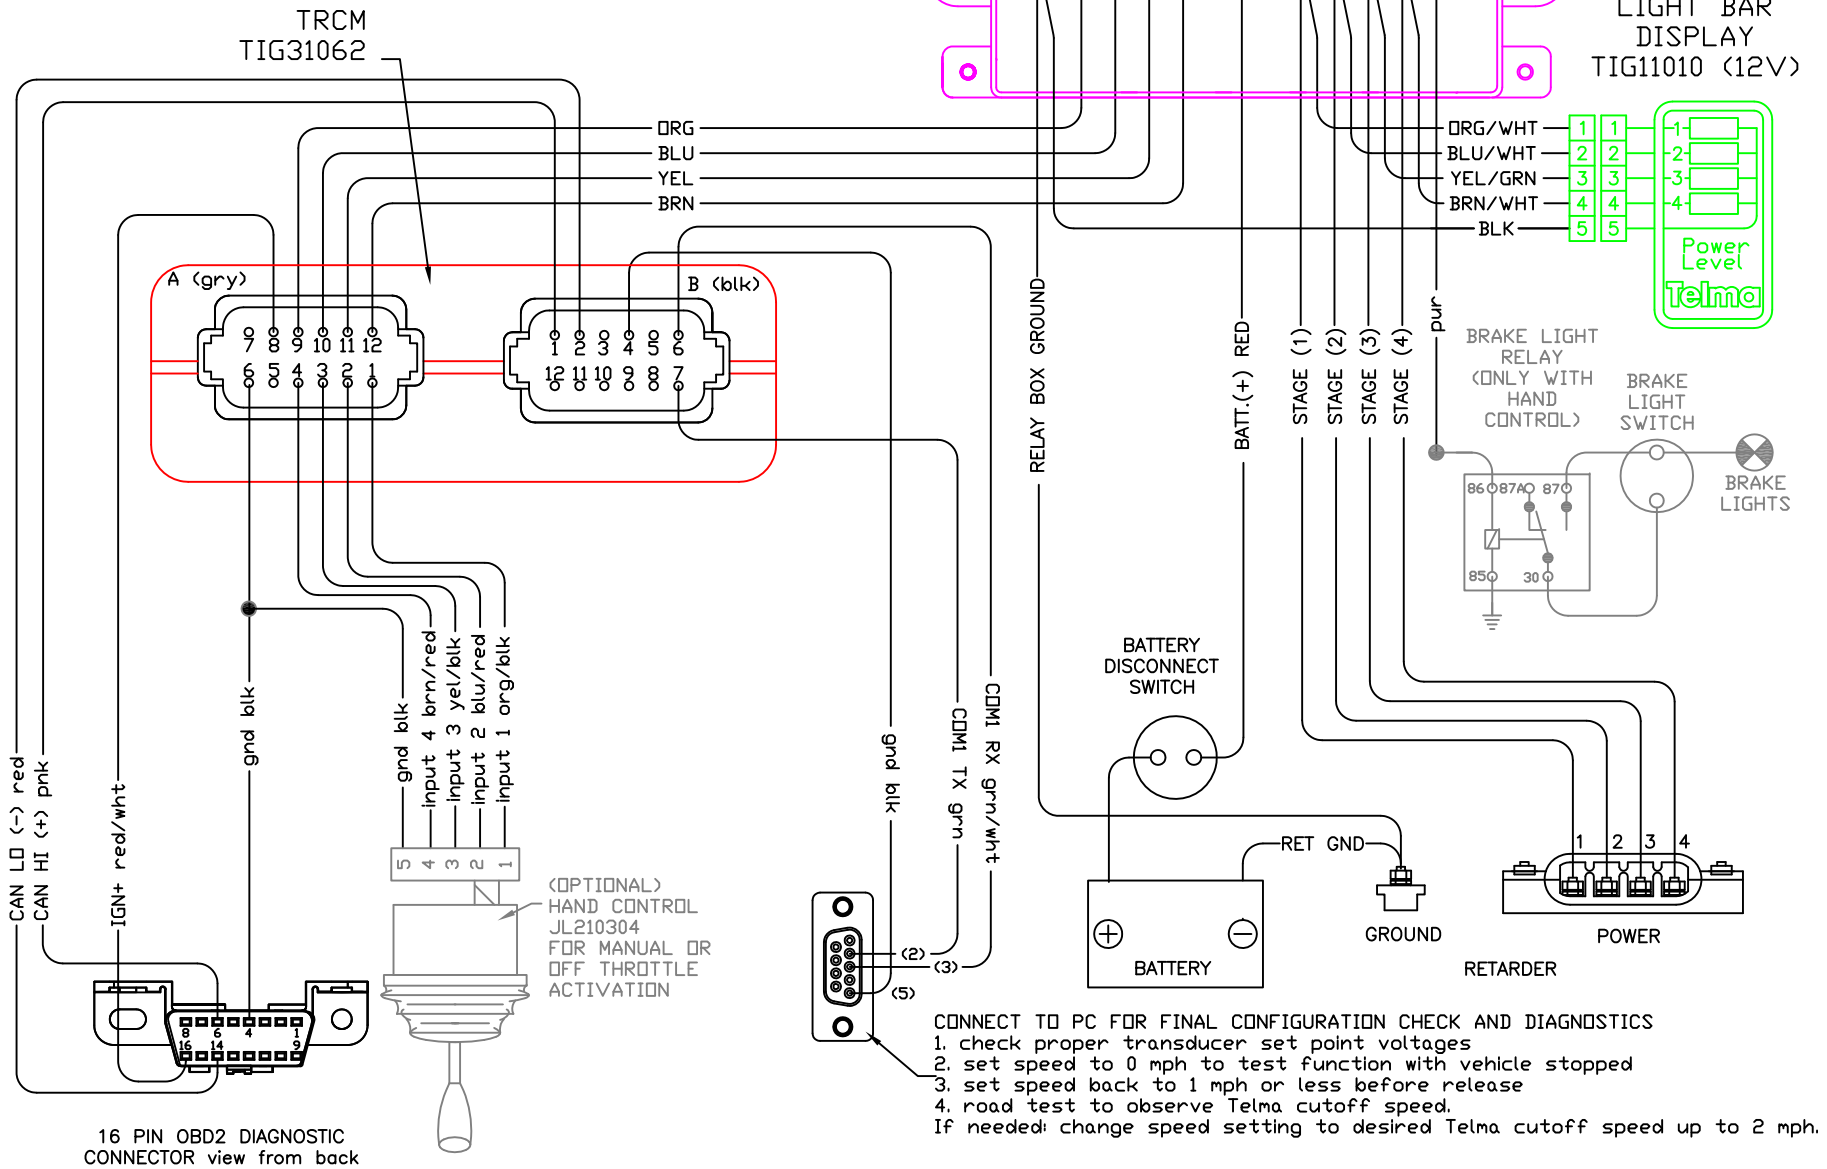

CONNECT TO PC FOR FINAL CONFIGURATION CHECK AND DIAGNOSTICS
 1. check proper transducer set point voltages
 2. set speed to 0 mph to test function with vehicle stopped
 3. set speed back to 1 mph or less before release
 4. road test to observe Telma cutoff speed.
 If needed: change speed setting to desired Telma cutoff speed up to 2 mph.