
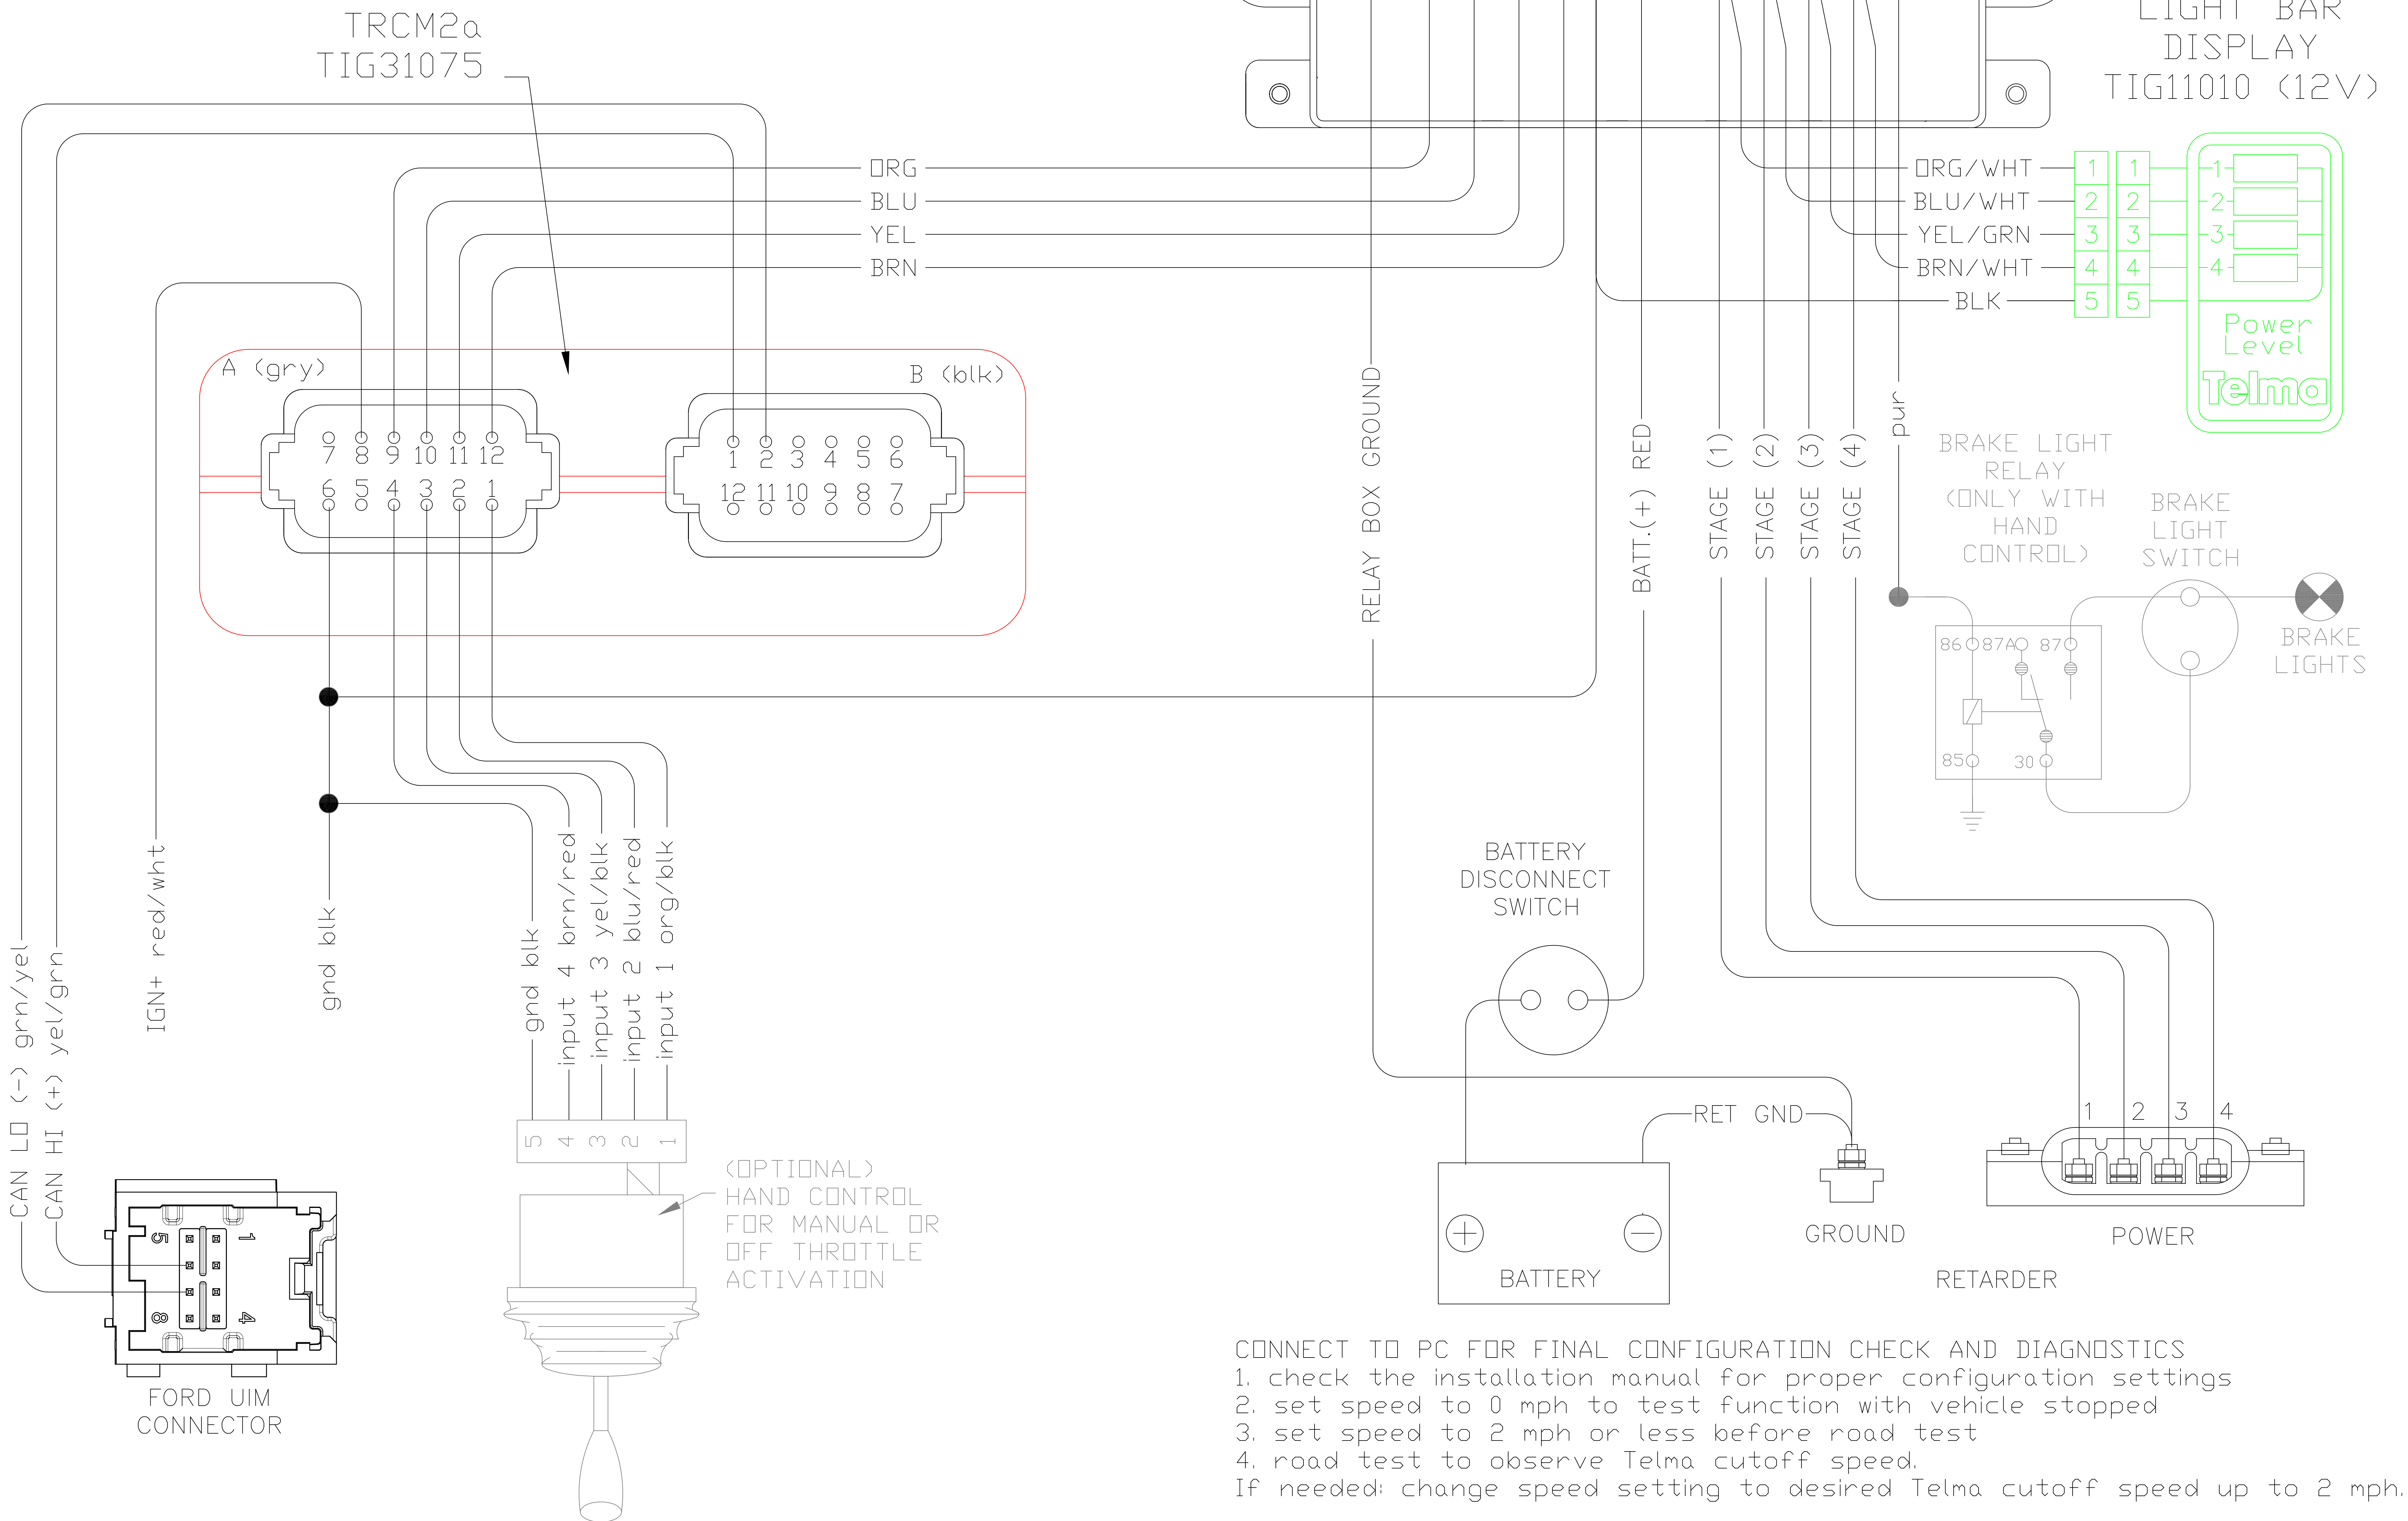


# TL114053 WIRING DIAGRAM WITH TRCM2 AND FORD UIM 30apr21jh

CAN control features:  
TRCM active outputs turn off  
under the following conditions.  
1) during ABS event  
(with progressive reactivation)  
2) Speed below 1 mph  
3) Throttle position greater than 1%

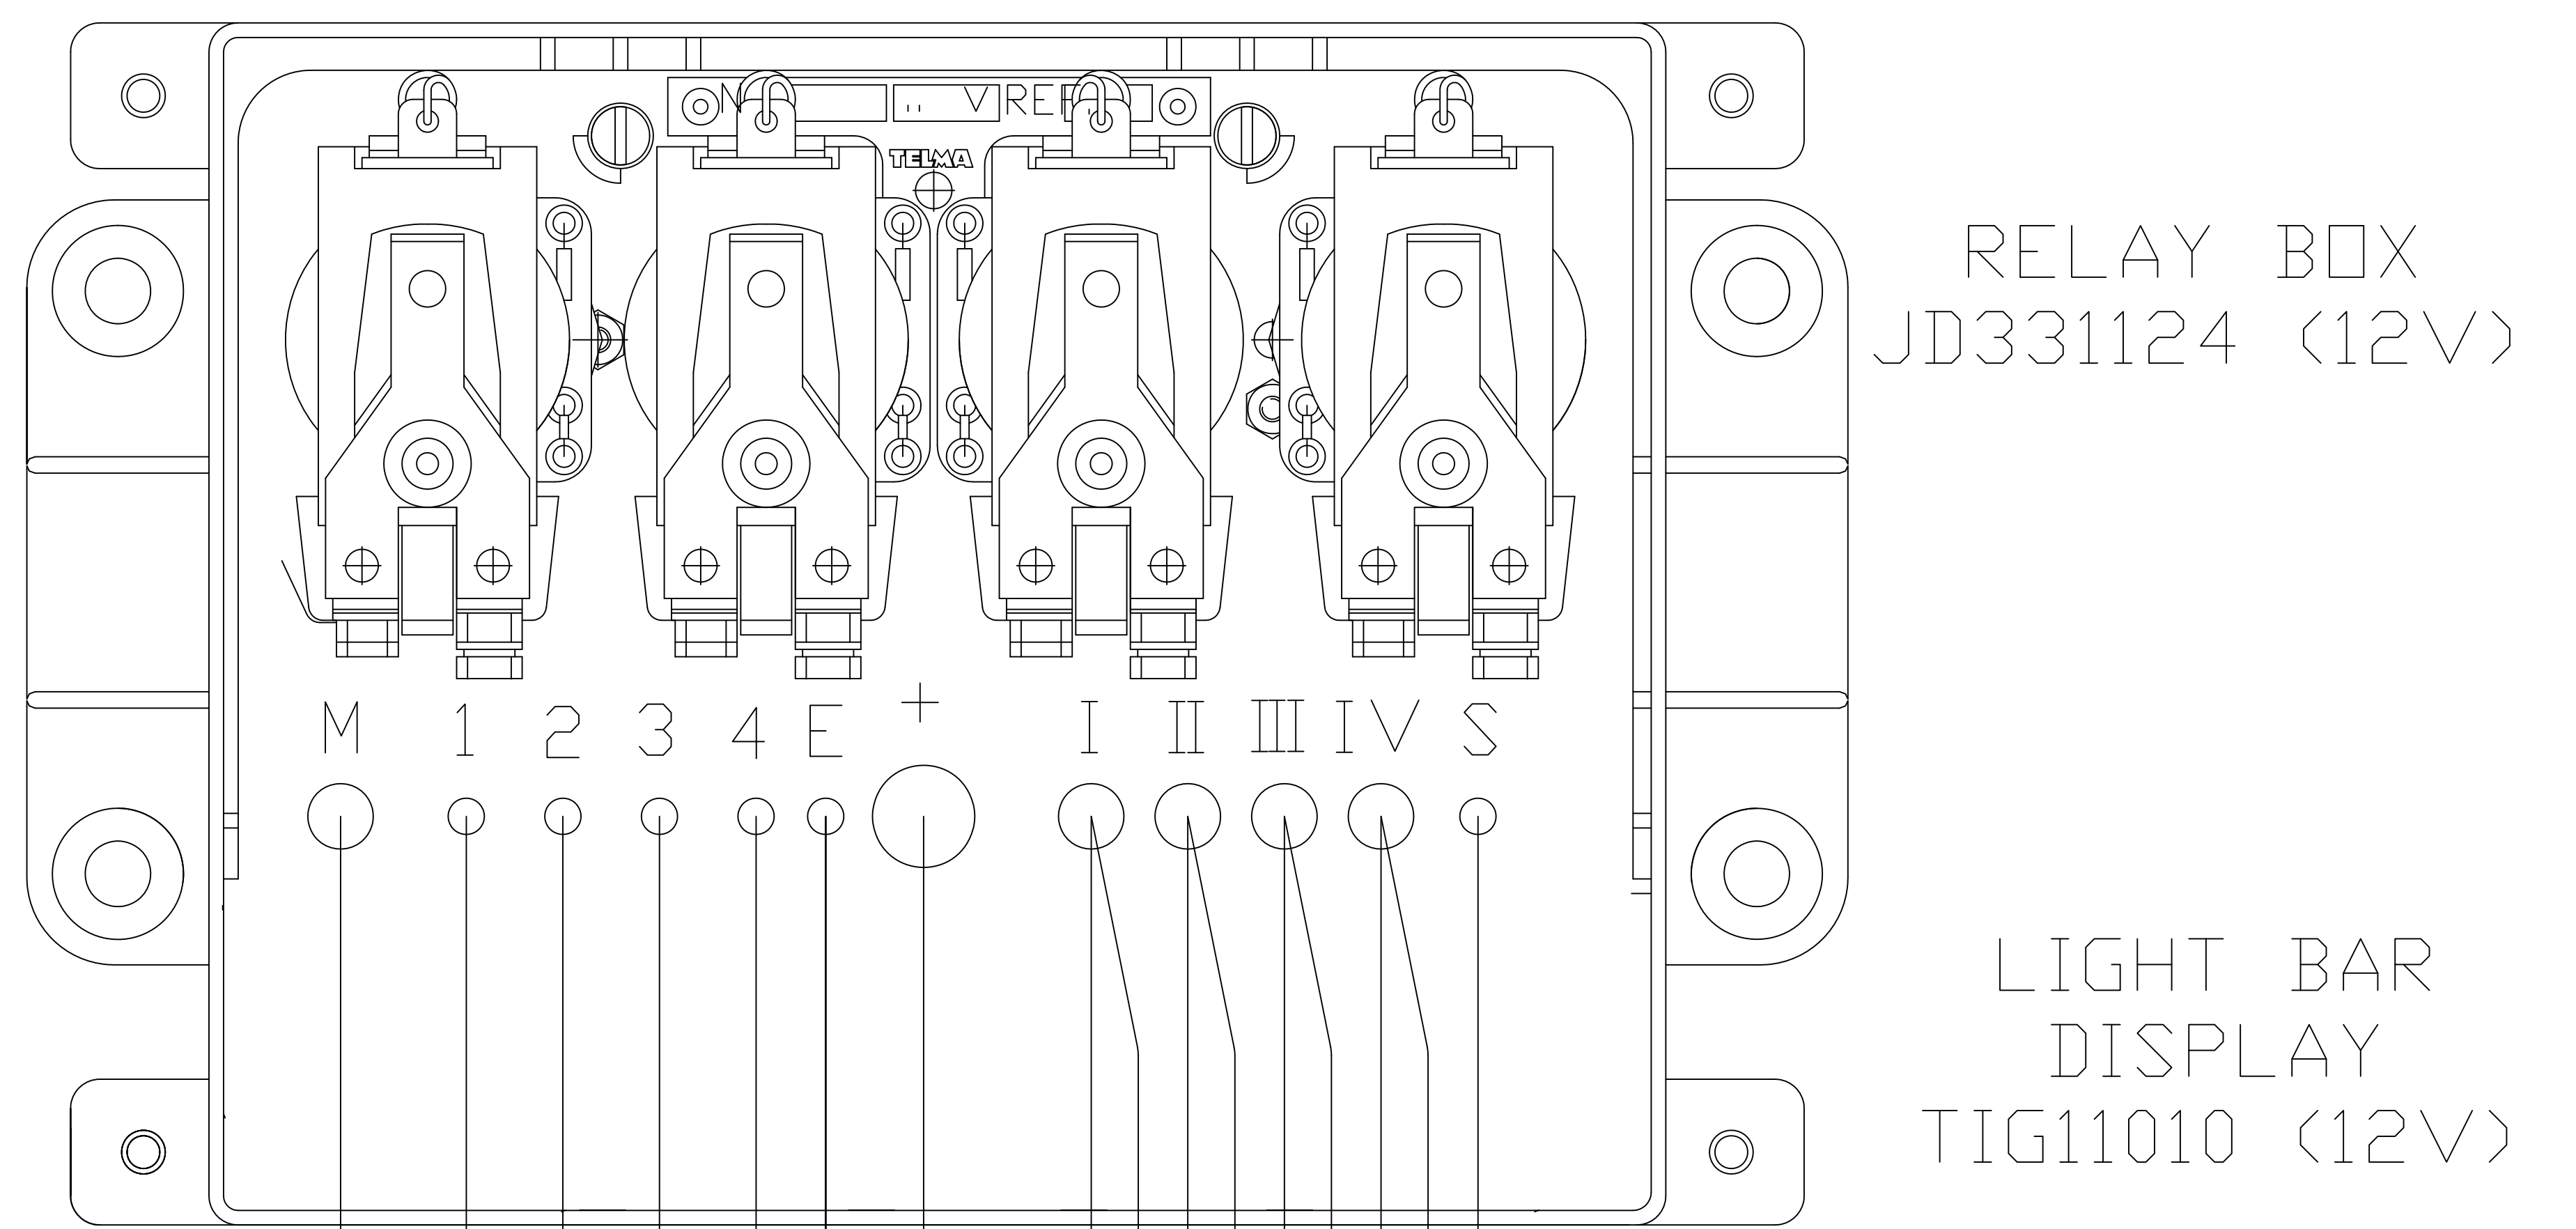

CONNECT TO PC FOR FINAL CONFIGURATION CHECK AND DIAGNOSTICS

1. check the installation manual for proper configuration settings
2. set speed to 0 mph to test function with vehicle stopped
3. set speed to 2 mph or less before road test
4. road test to observe Telma cutoff speed.

If needed: change speed setting to desired Telma cutoff speed up to 2 mph.