

# TL134061 AIR BRAKE WIRING DIAGRAM WITH TRCM JC241105 CONVERSION J1939 5sep12jh


NOTE: FIRMWARE VERSION 03.01.01  
OR LATER REQUIRED FOR J1939

J1939 CAN control features:  
TRCM active outputs turn off  
under the following conditions.  
1) during ABS event  
(with progressive reactivation)  
2) Speed below 1-2 mph  
3) Throttle position greater than 1%  
4) Cruise Control is engaged



TRCM  
TIG31062  
12V/24V

(OPTIONAL)  
25%/50%  
THROTTLE  
ACTIVATION

GROUND

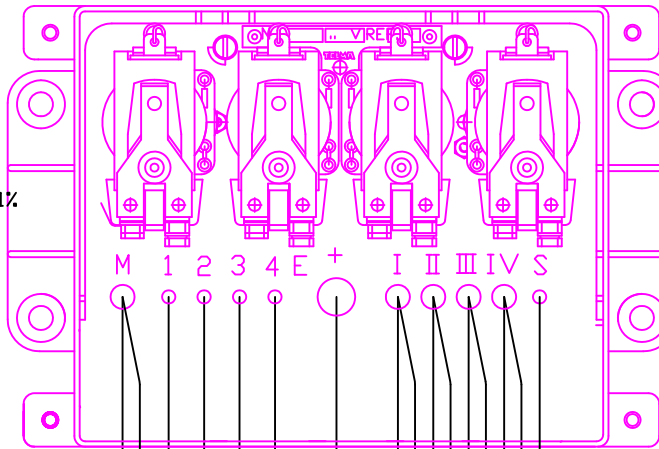

LIGHT BAR  
DISPLAY  
TIG11010 (12V)  
TIG21010 (24V)

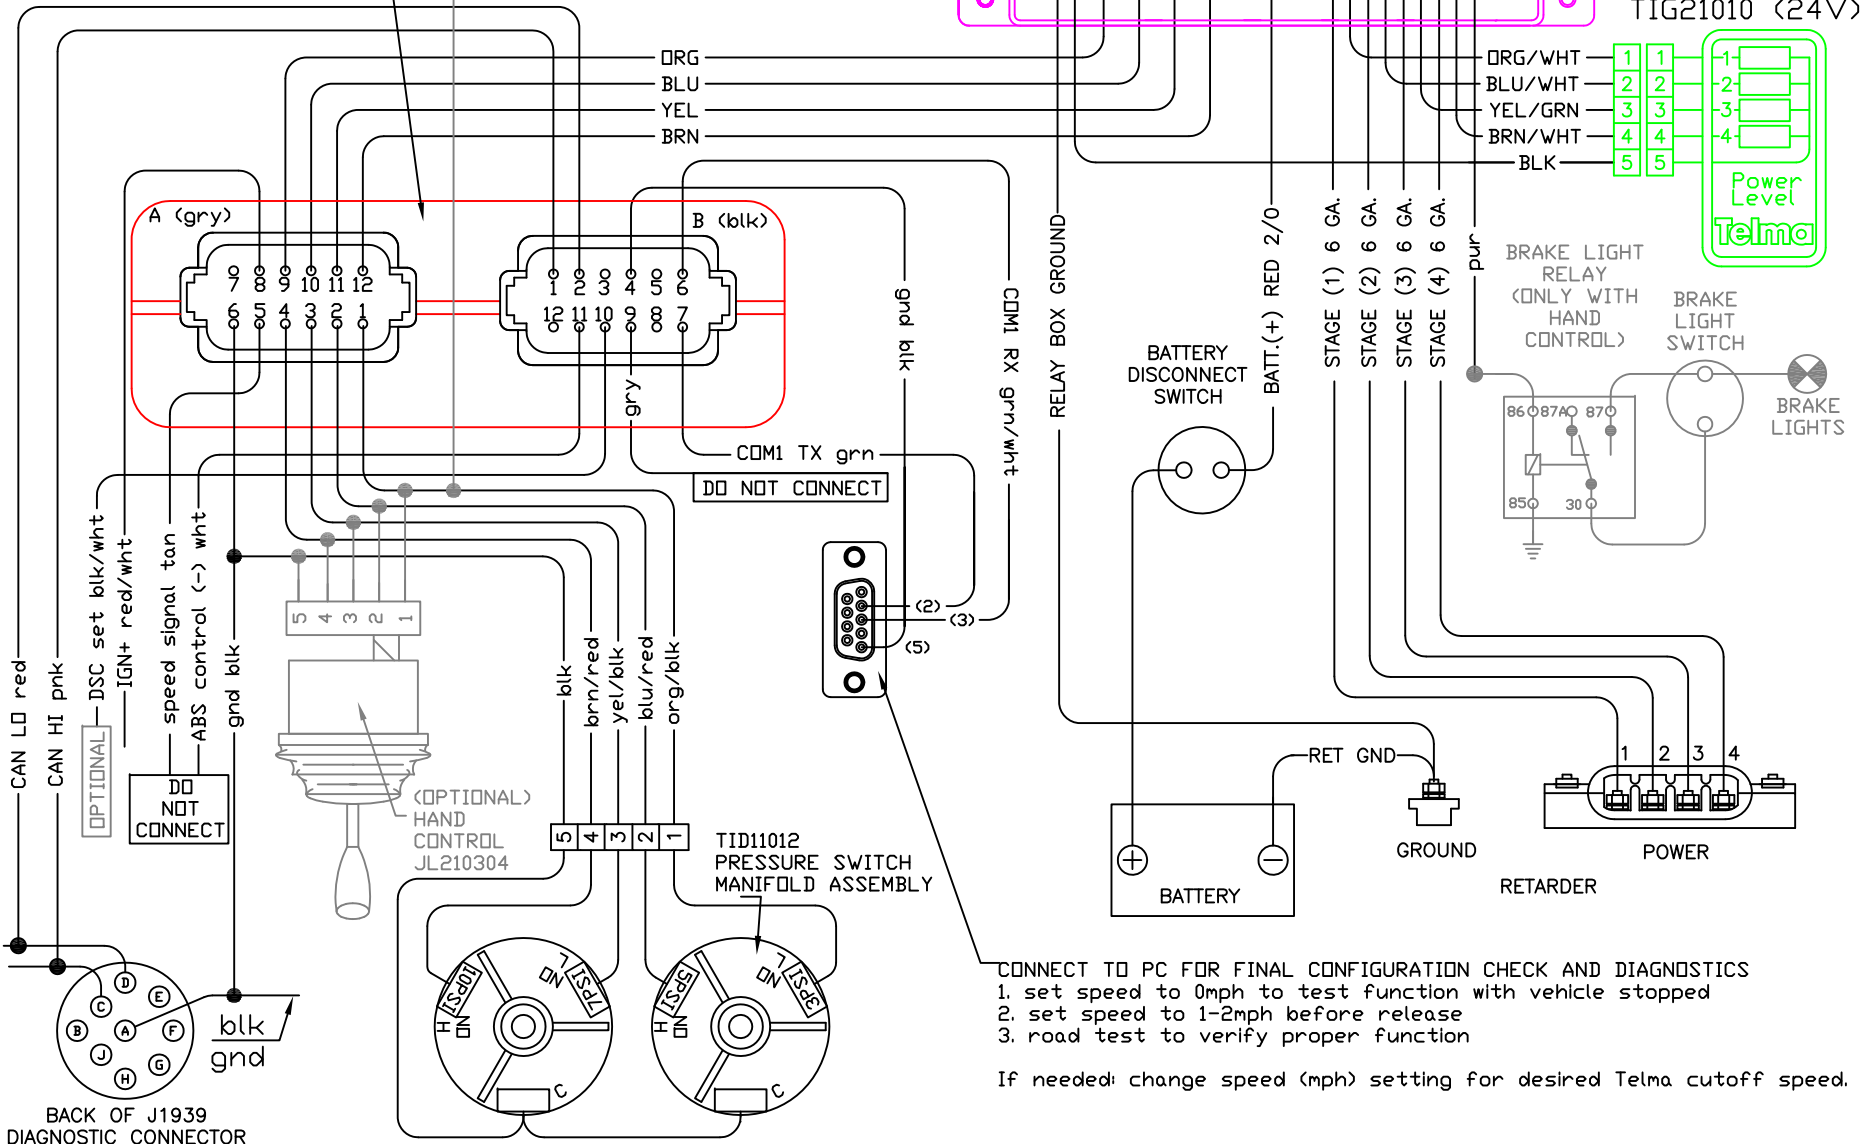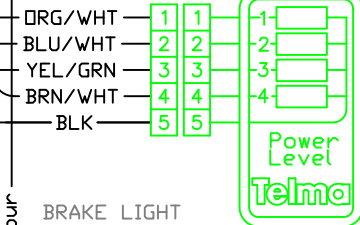

BACK OF J1939  
DIAGNOSTIC CONNECTOR