


TL134070  
 WIRING DIAGRAM TRCM  
 with rotary foot switch  
 and no ABS  
 30jul18jh

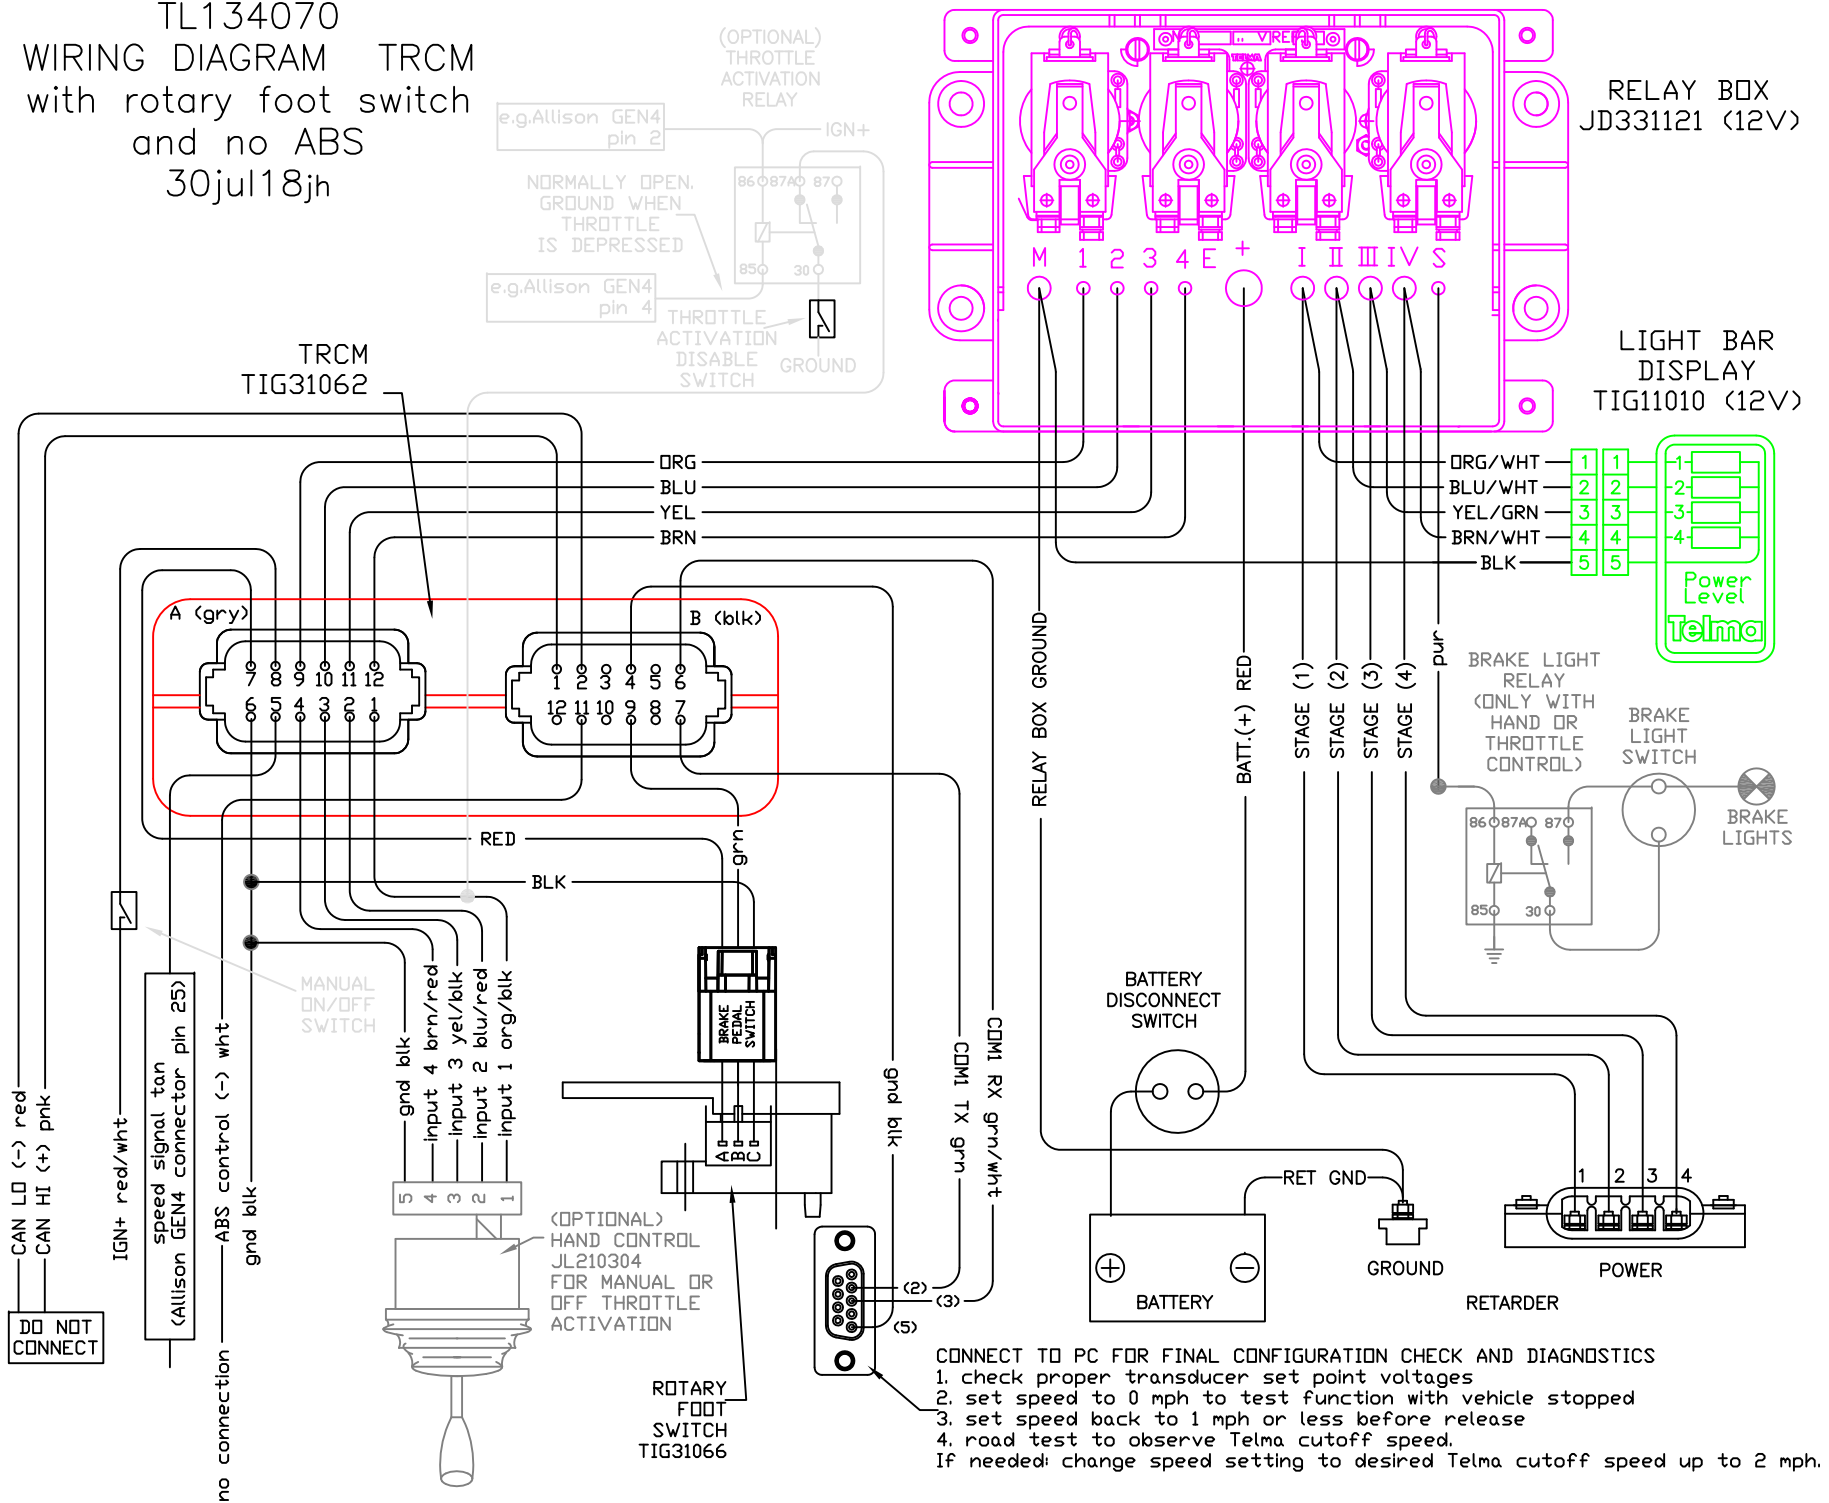

CONNECT TO PC FOR FINAL CONFIGURATION CHECK AND DIAGNOSTICS

1. check proper transducer set point voltages
2. set speed to 0 mph to test function with vehicle stopped
3. set speed back to 1 mph or less before release
4. road test to observe Telma cutoff speed.

If needed: change speed setting to desired Telma cutoff speed up to 2 mph.